GasMultiBloc®
Double solenoid valve

Pre-mount filter

MB-…415
MB-…420
DMV-…507
DMV-…512
DMV-…520

7.40

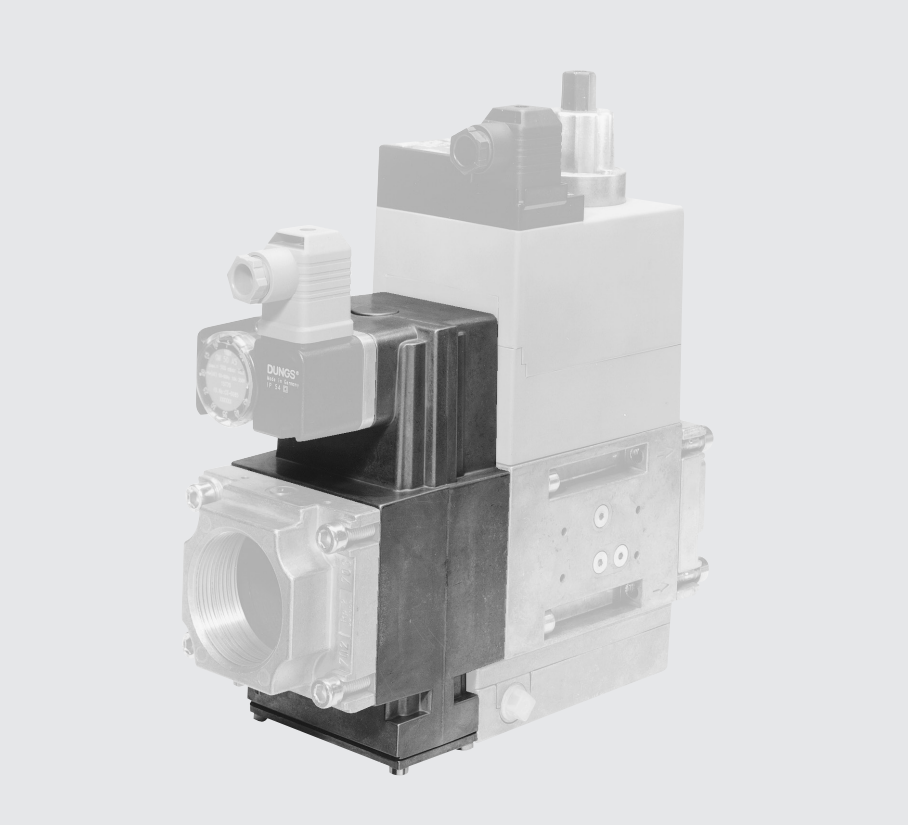

Technical description
Microfilter for gas pipes with high dust retention capacity for Dungs multiple actuators. Prepared for mounting on:

MB-D…415
MB-D…420
MB-ZR…415
MB-ZR…420
MB-VEF 415
MB-VEF 420

DMV-D…507/11
DMV-D…512/11
DMV-D…520/11

DMV-ZRD…507/11
DMV-ZRD…512/11
DMV-ZRD…520/11

DMV-SE 507/11
DMV-SE 512/11
DMV-SE 520/11

DMV-VEF 507/11
DMV-VEF 512/11
DMV-VEF 520/11

Application
Microfilter to protect downstream appliances. Filters are suitable for gases of gas families 1, 2, 3 and other neutral gaseous media.

Printed in Germany • Edition 01.18 • Nr. 226 616

Flow characteristic of pre-mount filter

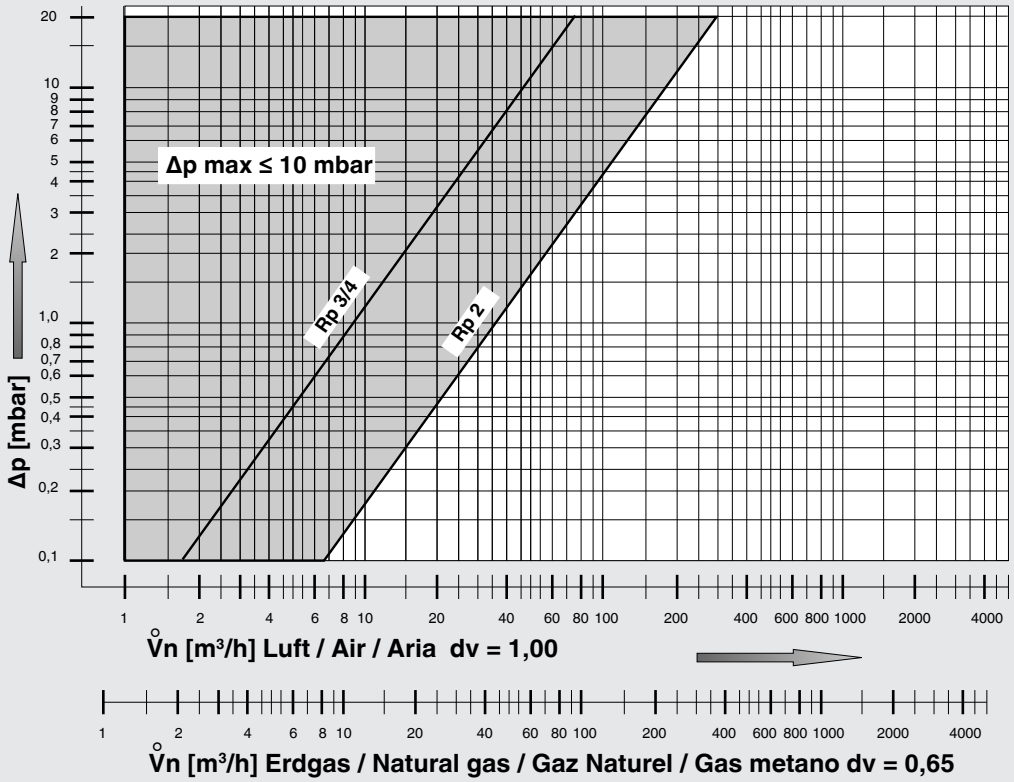

Flow characteristics of MB-...415 - 420

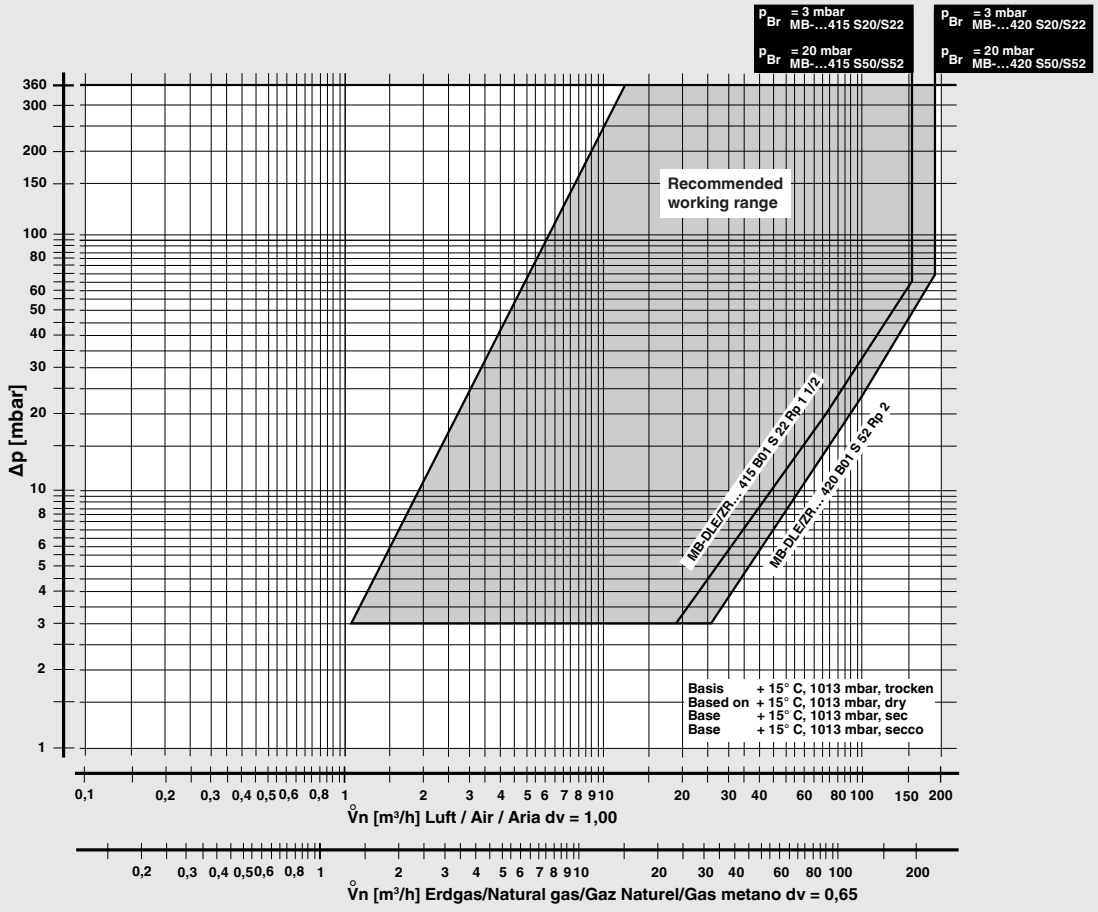

Flow characteristics of MB-VEF 415 - 420

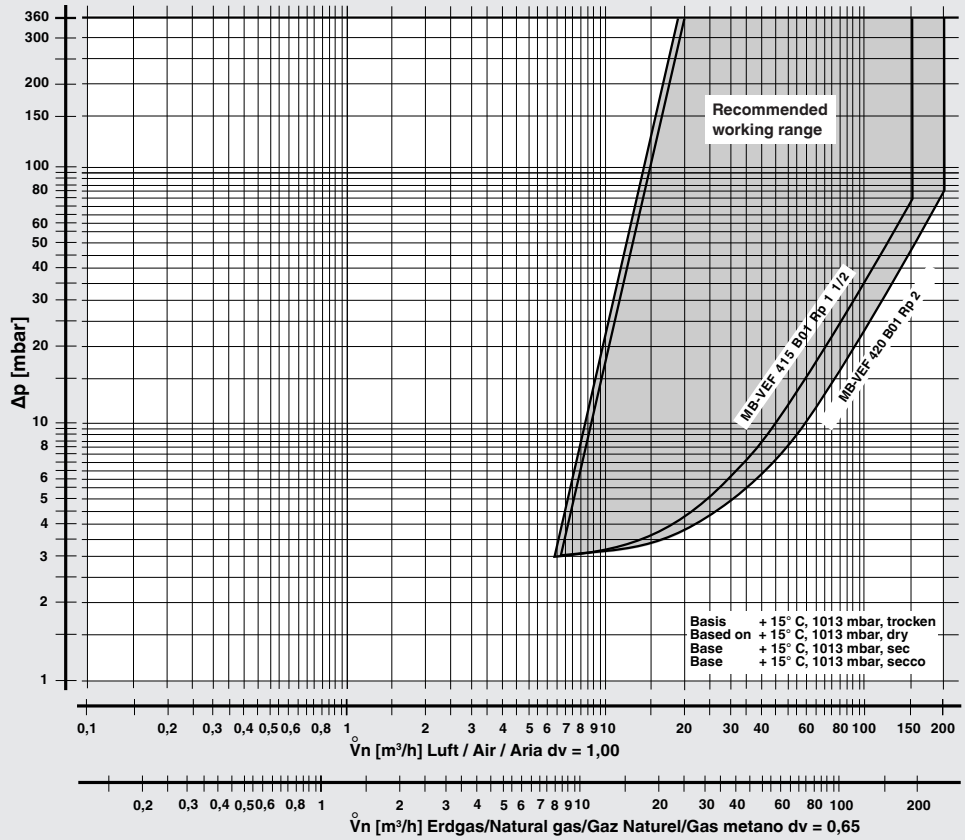

Flow characteristics of DMV-SE 507 - 520
Flow characteristics of DMV-VEF 507 - 520

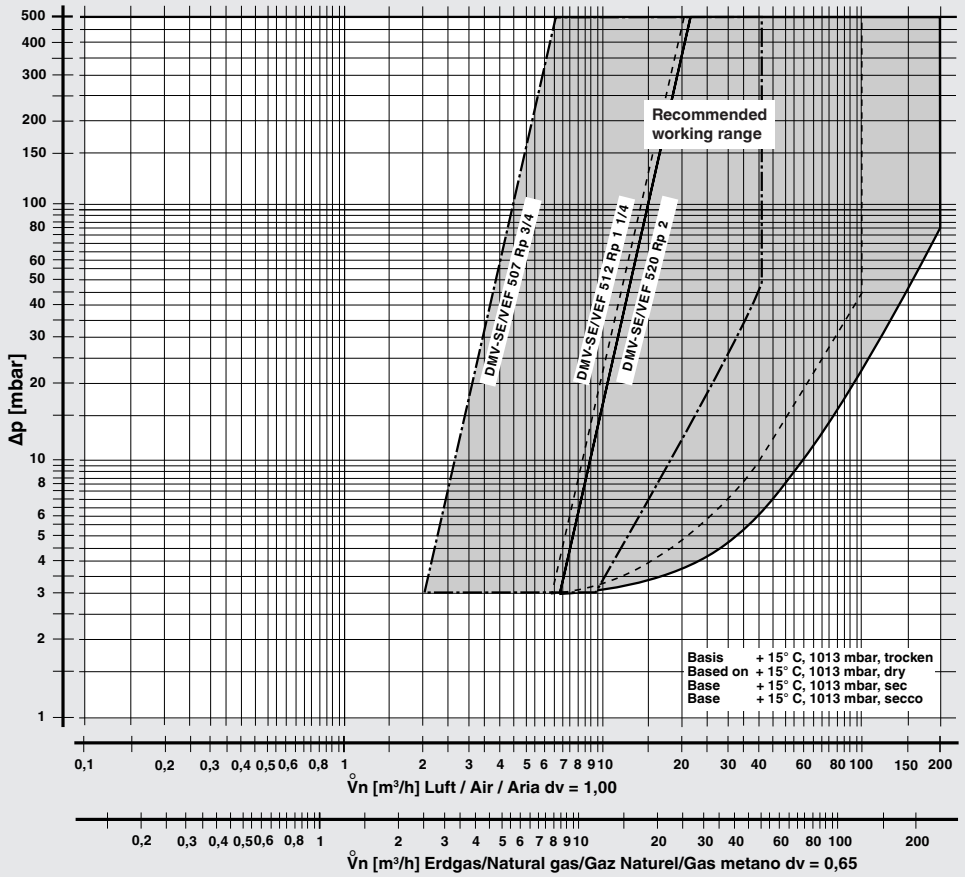

GasMultiBloc®
Double solenoid valve

Pre-mount filter
MB-…415
MB-…420
DMV-…507
DMV-…512
DMV-…520

DUNGS®
Combustion Controls

Dimensions [mm]

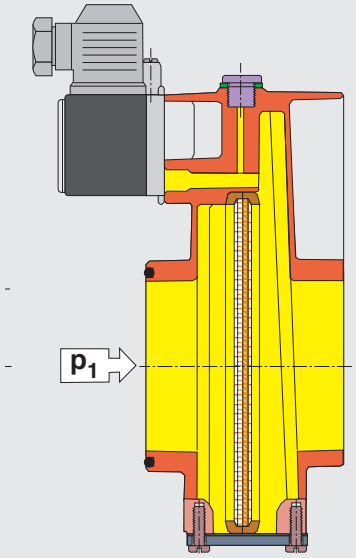

p_{max} = 500 mbar

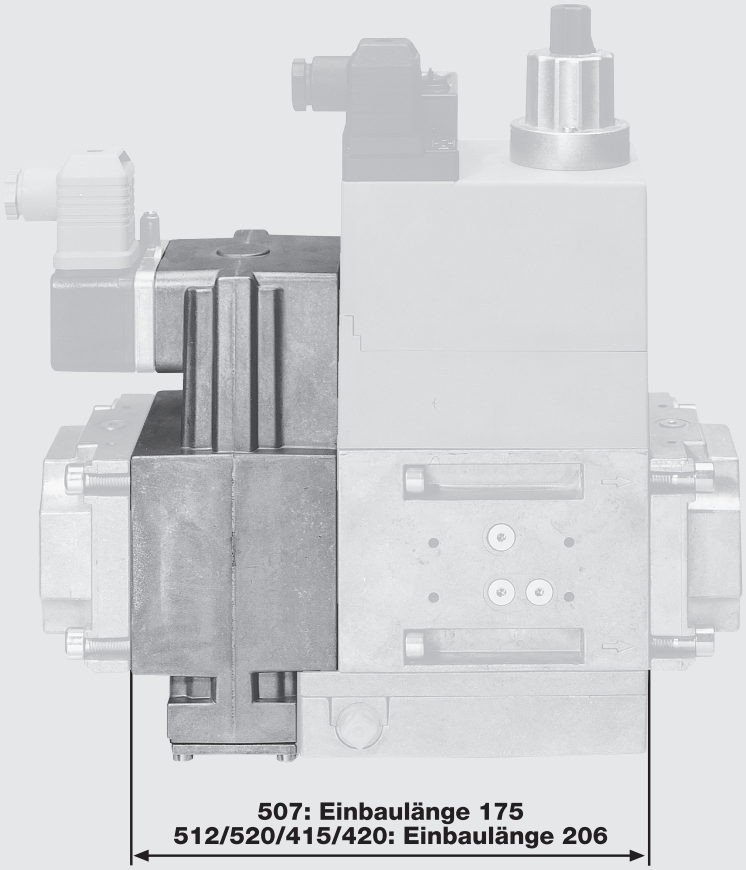

Designation	Order No.	
Pre-mount filter, complete, for Rp 3/4, Rp 1	232 440	Gas pressure switch GW A5 not contained in scope of supply
Spare filter insert	238 653	
Pre-mount filter, complete, for Rp 1 1/2, Rp 2	226 342	
Spare filter insert	226 997	

We reserve the right to make any changes in the interest of technical progress.

Karl Dungs Limited
18, Liberty Way
Attleborough Fields Ind. Est.
GB-Nuneaton CV11 6RZ
Telephone +44 (0) 24/76 37 57 33
Fax +44 (0) 24/76 34 28 52
e-mail info.gb@dungs.com
Internet www.dungs.com

Karl Dungs GmbH & Co. KG
Karl-Dungs-Platz 1
D-73660 Urbach, Germany
Telephone +49 (0)7181-804-0
Fax +49 (0)7181-804-166
e-mail info@dungs.com
Internet www.dungs.com